

650V 600mohm Super-Junction Power MOSFET
AK3S65N6K0FMF

Description:

This SJ device provides good FOM performance, better EMI for customer application.

Features:



- EMI-Friendly
- RoHS compliant
- Halogen-free

Applications:

- High Frequency Switching
- Quick Charging and Adapter

Key Performance Parameters:

Parameter	Value	Unit
V_{DS}	650	V
$R_{DS(on), max} @V_{GS} = 10\text{ V}$	600	mΩ
I_D	8	A



Ordering Information:

Ordering Code	Package Type	Marking Code	Form	Packing
AK3S65N6K0FMF	TO-220F	3S65N6K0FMF	Tube	See the detail package information

Maximum Ratings (T_A = 25°C unless otherwise noted)

Symbol	Parameter	Value	Units
V _{DS}	Drain - Source Voltage	650	V
I _D	Drain Current - Continuous (T _C = 25°C) ^(Note 1)	8	A
	Drain Current - Continuous (T _C = 100°C)	5	A
I _{DM}	Drain Current - Pulsed ^(Note 2)	24	A
V _{GS}	Gate - Source Voltage	± 30	V
E _{AS}	Single Pulsed Avalanche Energy ^(Note 3)	30	mJ
P _D	Power Dissipation (T _C = 25°C)	37	W
dV/dT	MOSFET dv/dt ruggedness, V _{DS} = 0...480 V	50	V/ns
	Reverse diode dv/dt, V _{DS} = 0...480 V	50	V/ns
T _J , T _{STG}	Operating and Storage Temperature Range	-55 to +150	°C

Thermal Characteristics

Symbol	Parameter	Value	Units
R _{θJC}	Thermal Resistance, Junction - to - Case, Steady State	3.3	°C/W
R _{θJA}	Thermal Resistance, Junction - to - Ambient, Steady State ^(Note 4)	55	°C/W







Notes:







1. The max drain current rating limited by maximum junction temperature
2. Repetitive Rating: Pulse width limited by maximum junction temperature
3. L = 75 mH, V_{DD} = 100 V, I_{AS} = 0.9 A, R_G = 50 Ω, Starting T_J = 25 °C
4. Mount on minimum PCB layout

Electrical Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
Static Characteristics						
V _{(BR)DSS}	Drain - Source Breakdown Voltage	V _{GS} = 0 V, I _D = 250 μA	650			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = 650 V, V _{GS} = 0 V			10	μA
I _{GSS}	Gate Leakage Current	V _{GS} = ± 30 V, V _{DS} = 0 V			±100	nA
V _{GS(th)}	Gate Threshold voltage	V _{DS} = V _{GS} , I _D = 250 μA	2.5	3.5	4.5	V
R _{DS(ON)}	Drain - Source on - state resistance	V _{GS} = 10 V, I _D = 4 A		510	600	mΩ
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} = 400 V, V _{GS} = 0 V, f = 1 MHz		338		pF
C _{oss}	Output Capacitance			13		pF
C _{rss}	Reverse Transfer Capacitance			5.5		pF
C _{o(er)}	Effective output capacitance, energy related	V _{DS} = 0...400 V, V _{GS} = 0 V		20		pF
C _{o(tr)}	Effective output capacitance, time related	V _{DS} = 0...400 V, V _{GS} = 0 V, I _D =constant		126		pF
R _g	Gate Resistance	f = 1 MHz		28		Ω
Switching Characteristics						
t _{d(on)}	Turn On Delay Time	V _{DD} = 400 V , I _D = 4 A, V _{GS} = 10 V, R _G = 5 Ω		52		ns
t _r	Rise Time			8		ns
t _{d(off)}	Turn Off Delay Time			29		ns
t _f	Fall Time			9		ns
Q _g	Total Gate Charge	V _{DD} = 400 V , I _D = 4 A, V _{GS} = 10 V		14		nC
Q _{gs}	Gate - Source Charge			2		nC
Q _{gd}	Gate - Drain Charge			9		nC
Drain-Source Diode Characteristics and Maximum Ratings						
I _S	Maximum Continuous Body - Diode Forward Current				8	A
I _{SM}	Maximum Pulsed Body - Diode Forward Current				24	A
V _{SD}	Diode Forward Voltage	V _{GS} = 0 V, I _S = 8 A		1.3		V
t _{rr}	Reverse recovery time	V _{DD} = 400 V, I _D = 4 A, di/dt = 100 A/μs		62		ns
Q _{rr}	Reverse recovery charge			0.33		μC
I _{rrm}	Peak Reverse Recovery Current			10		A

Electrical Characteristics Diagrams

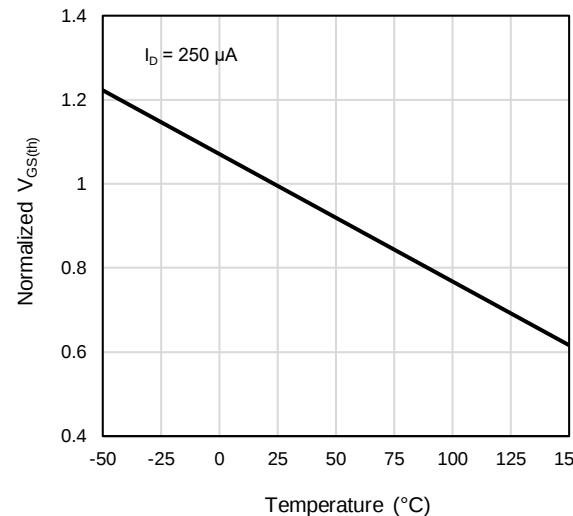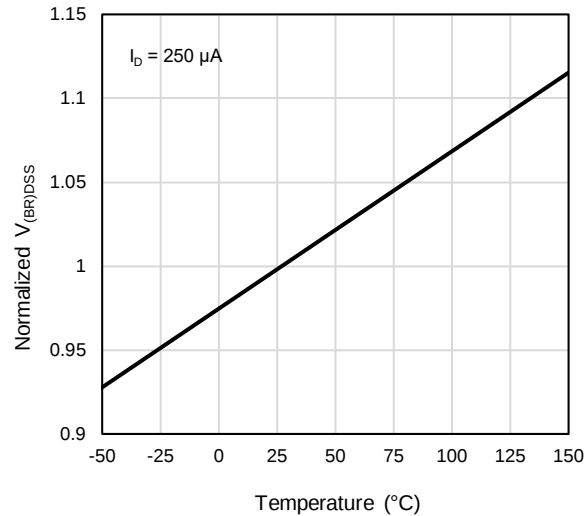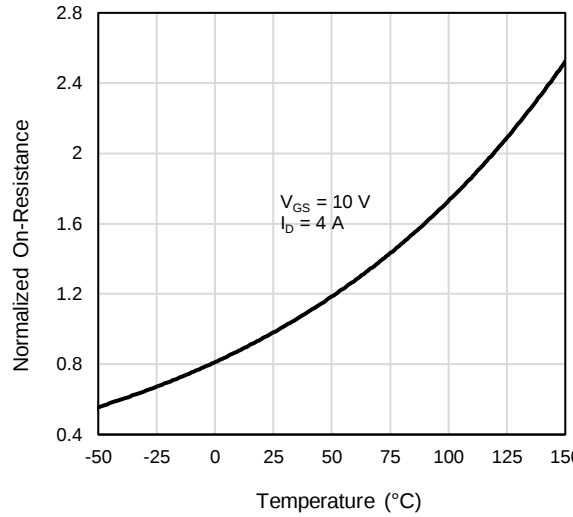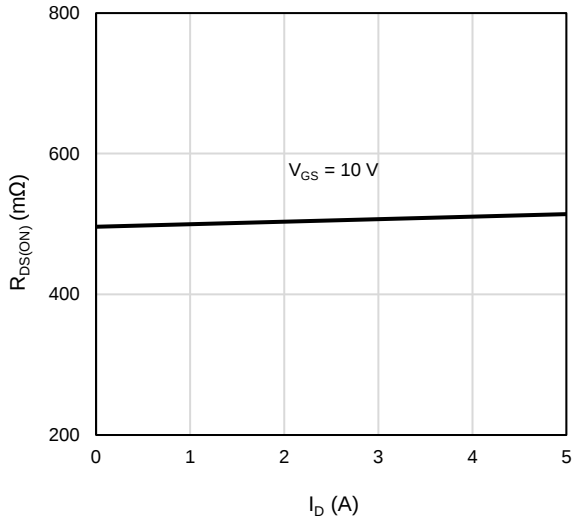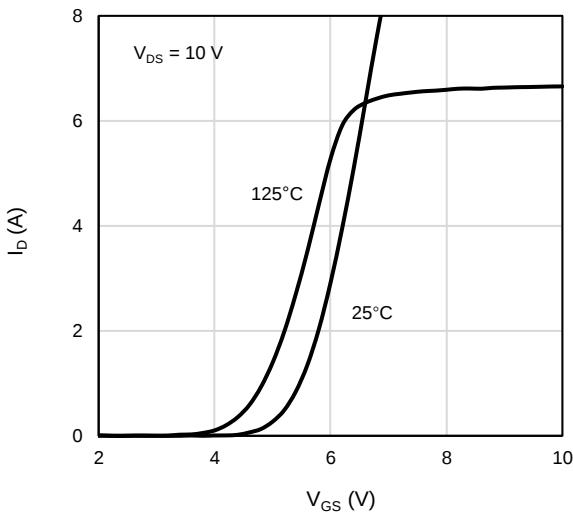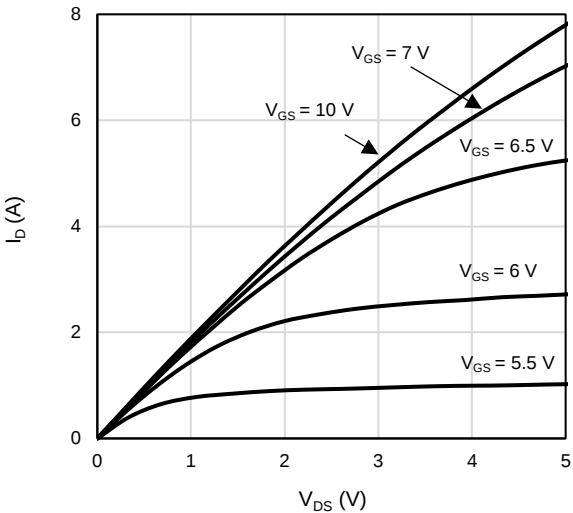

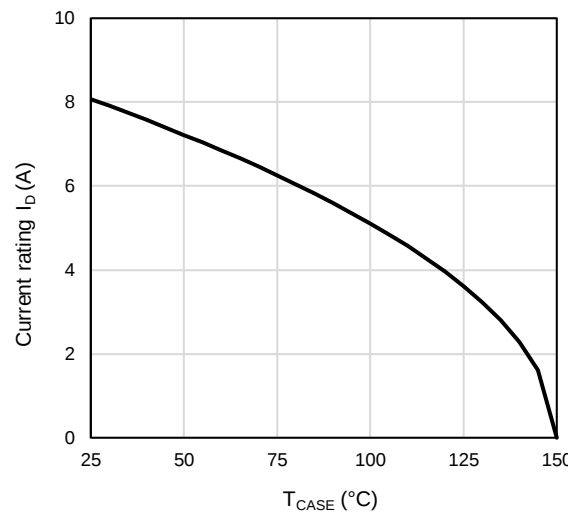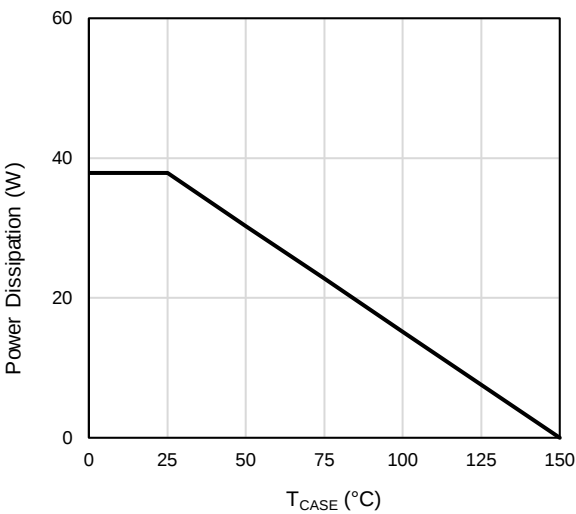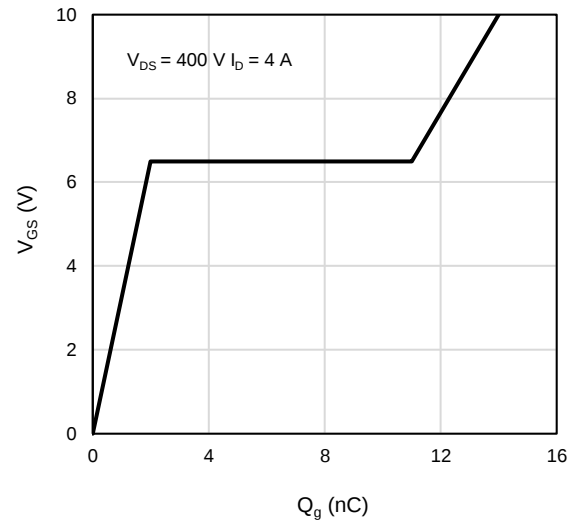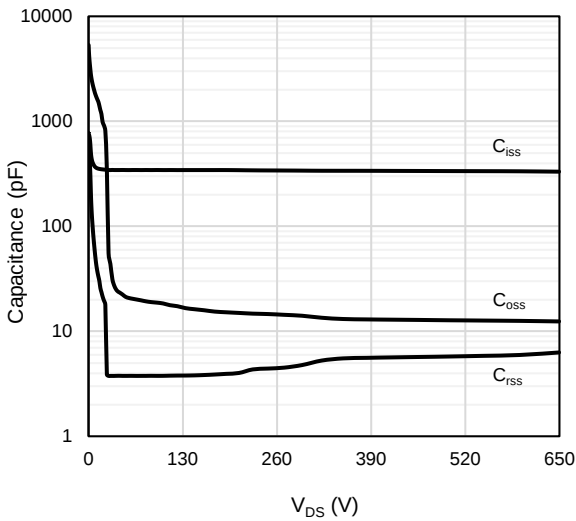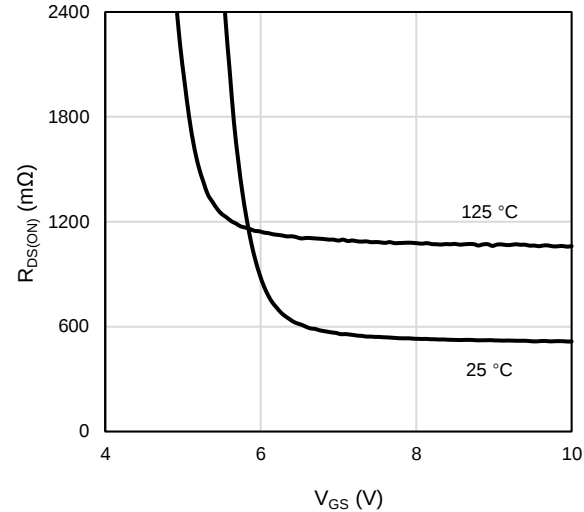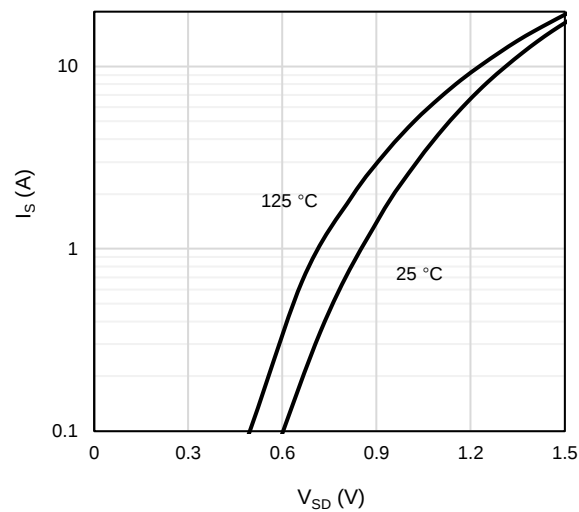

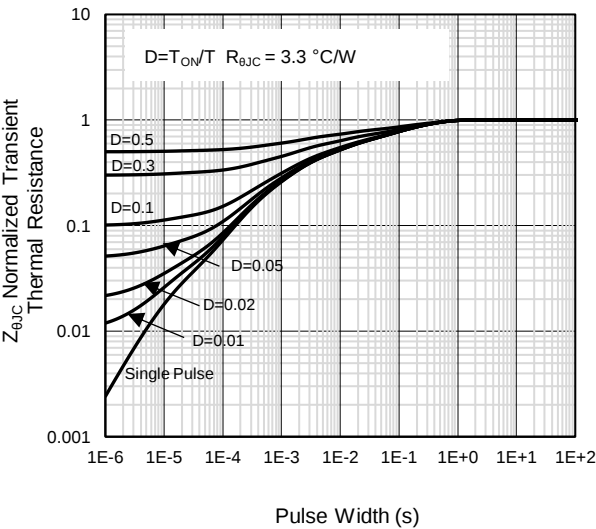


Figure 13: Normalized Maximum Transient Thermal Impedance


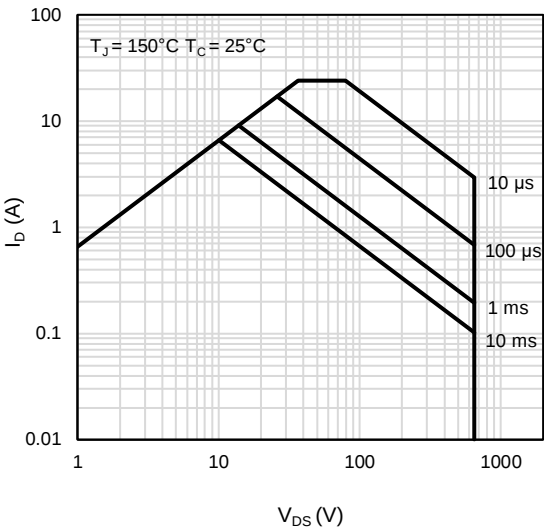



Figure 14: Maximum Forward Biased Safe Operating Area

Test Circuit and Waveform


Gate Charge Test Circuit & Waveform

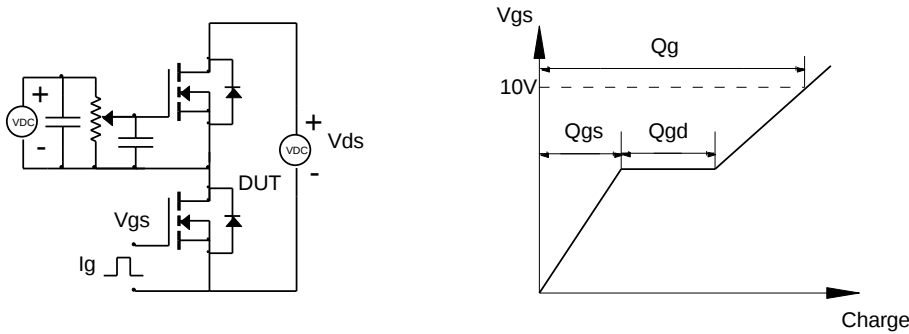


Resistive Switching Test Circuit & Waveforms

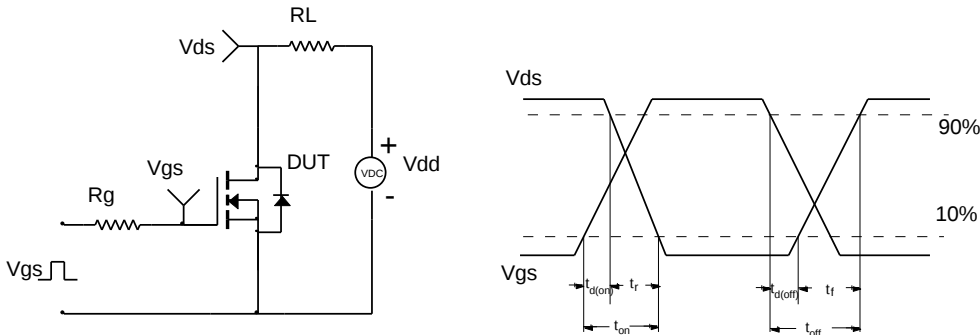

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

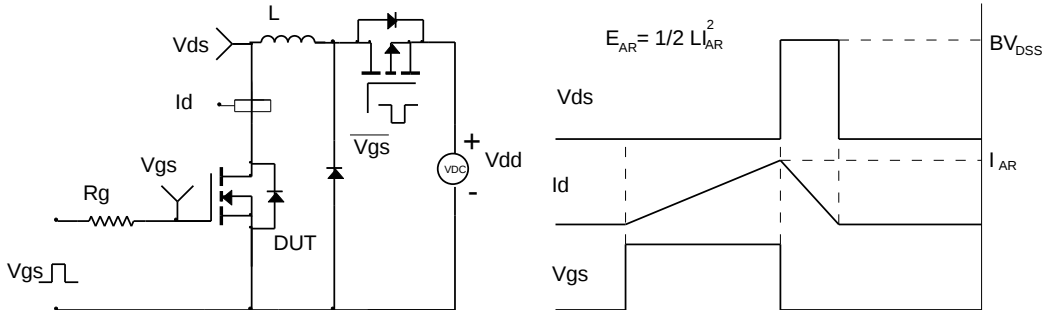

Diode Recovery Test Circuit & Waveforms

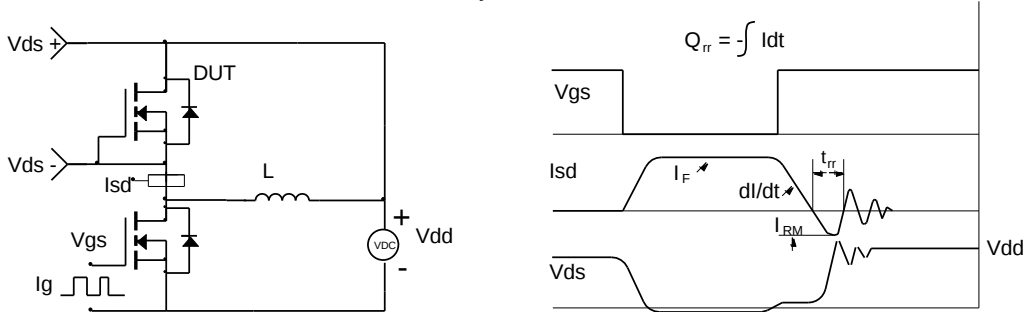

Revision History

Revision	Released	Remark
Rev.1.0	2025	Initial Release

Disclaimer

The information given in this document describes the independent performance of the product, but similar performance is not guaranteed under other working conditions, and cannot be guaranteed when installed with other products or equipment. To achieve the required performance of the product in actual scenarios, the customer should conduct a complete application test to assess the functionality of the product.

Alkaidsemi assumes no responsibility for equipment failures result from using products at values that exceed the ratings, operating conditions, or other parameters listed in the product specifications.

The product described in this specification is not applicable for aerospace or other applications which requires high reliability. Customers using or selling these products for use in medical, life-saving, or life-sustaining applications do so at their own risk and agree to fully indemnify.

Due to product or technical improvements, the information described or contained herein may be changed without prior notice